



Overview

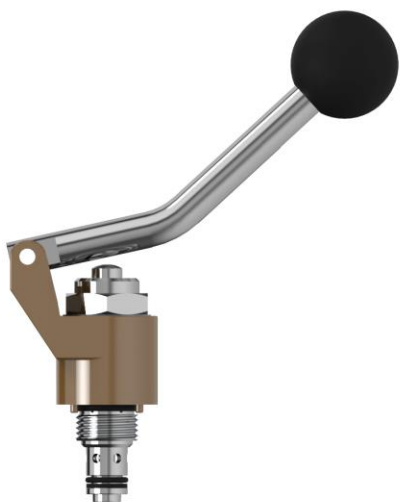

Symbol



Description

Manually operated normally closed, poppet-type valve.

Operation

The valve blocks flow in both the directions. When the plunger is actuated, the poppet opens, allowing flow in either direction.

Features:

- Hardened, precision ground parts for durability.
- Industry common cavity.
- Compact size.

Ratings

Operating Pressure	250 Bar
Flow	18 lpm
Flow Rating	Refer Pressure drop VS Flow Graph
Internal Leakage	2 drop/min max. at operating pressure
Temperature	-30°C to +120°C (-22°F to +250°F)
Cavity	C-08-2
Fluid	Mineral-based fluid with viscosities of 7.4 to 420 cSt.

Performance

Pressure drop vs Flow Graph

