


Overview

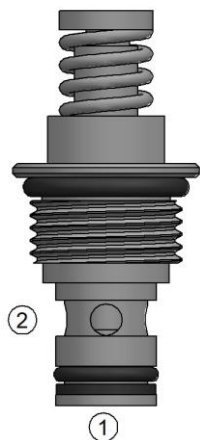

Symbol

Description


Manually operated normally open, poppet-type valve.

Operation

There will be free flow in both the directions. When the lever is actuated, the poppet closes, blocking flow in both the direction.

Features:

- Hardened, precision ground parts for durability.
- Industry common cavity.
- Compact size.



Ratings


Operating Pressure	250 bar
Flow	18 lpm
Flow Rating	Refer Pressure drop VS Flow Graph
Internal Leakage	2 drop/min.max. at operating pressure
Temperature	-30°C to +120°C (-22°F to +250°F)
Cavity	C-08-2
Fluid	Mineral-based fluid with viscosities of 7.4 to 420 cSt.

Model Code

MV	-	08	-	2	-	NO	-	N	-		-		-		-	LK
Manual Valve		Size		Flow Path		Normally Open		Seal N - Buna-N V - Viton		Port Size 4T = SAE 4T 8T = SAE 8T 3G = G3/8 3N = NPT3/8 Other porting is available		Material A - Aluminium S - Steel				Lever Kit



Installation Specifications

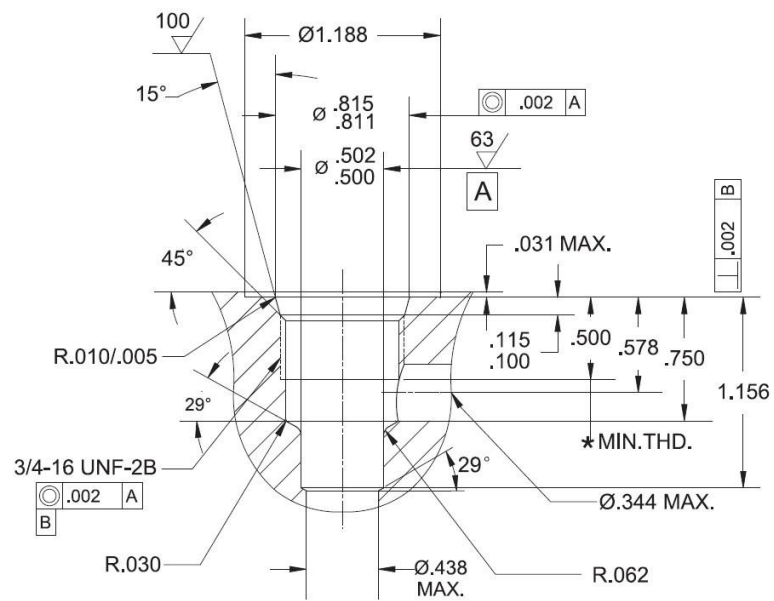

CAVITY:08-2